

SPECIFICATIONS

MODEL NUMBER	POWER	TABLE	BORE	STROKE	RAM SPEED			CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
					ADVANCE	PRESS	RETURN			L	W	H
GSP-150 48	5 HP 3 phase	48" x 96"	11"	16"	24 IPM	6 IPM	28 IPM	150	0,000	00"	00"	00"
GSP-150 68	5 HP 3 phase	72" x 96"	11"	16"	24 IPM	6 IPM	28 IPM	150	0,000	00"	000"	00"

Standard voltages available - please specify when ordering.


GANTRY STRAIGHTENING PRESS 150 Ton

STANDARD FEATURES


- ✓ **Powered movable workhead** for off-center work allows operator to position the cylinder from left to right and front to back with the touch of a lever.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

Optional:

Handheld wireless remote control with variable speed on all axis, permits the operator to move freely around the press.

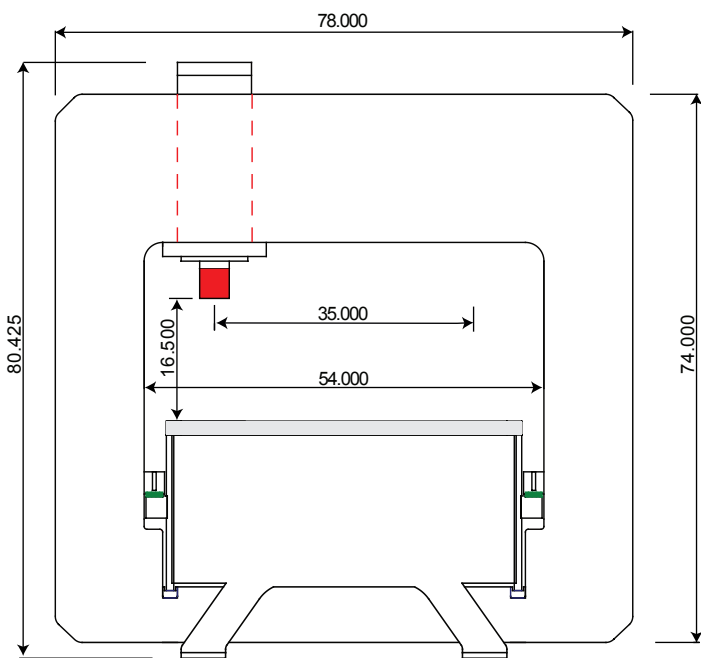

Front View

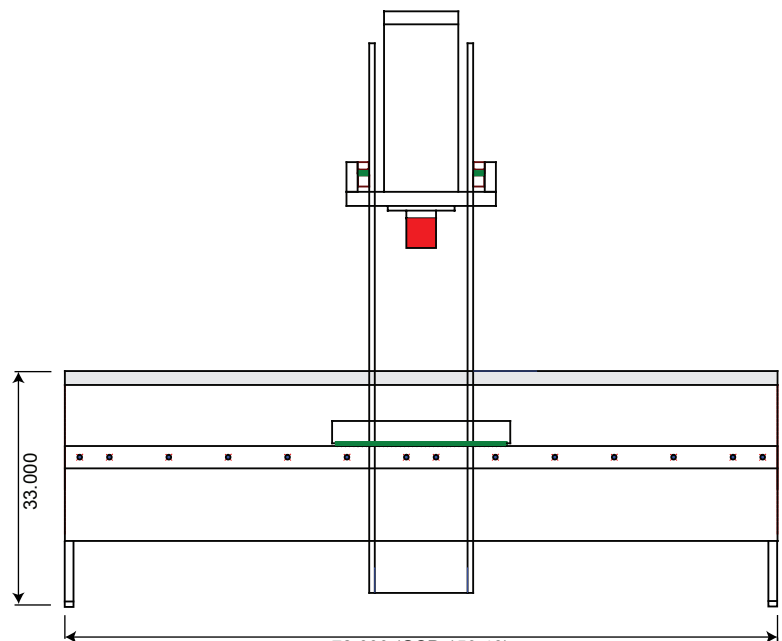

72.000 (GSP-150 46)
96.000 (GSP-150 48)

Side View